




Public Address System

MONITOR PANEL

PC1012M

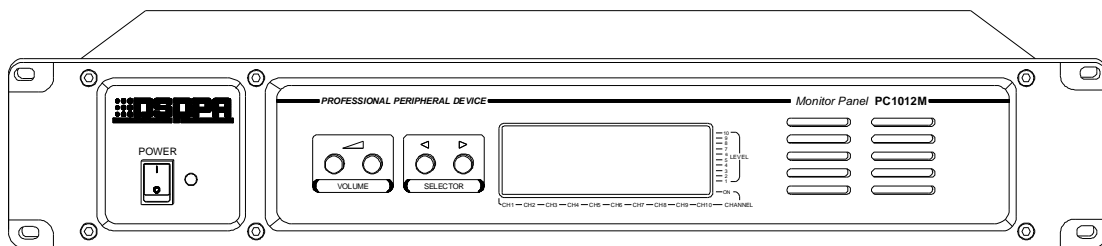

## OWNER'S MANUAL


---

Before operating, please read this manual completely.

### *FEATURES*


- l 10CH inputs.
- l Volume control.
- l A display screen is provided for the quick and easy visual monitoring of input level.
- l Build in monitor speaker.
- l Can connect to 8 equipments via the address setting.
- l Remote controlled by PC available.
- l AC 220V or 110V and DC24V selected.

# FRONT PANEL

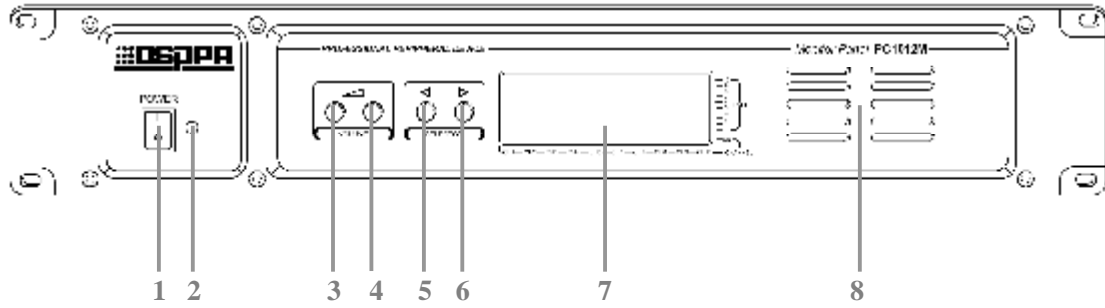


- 1 Power switch(1 is power on and the “power LED” is on )
- 2 Power indicator
- 3 Lower volume
- 4 Higher volume
- 5 Left shift key
- 6 Right shift key
- 7 Monitor Speaker
- 8 Display screen

# REAR PANEL

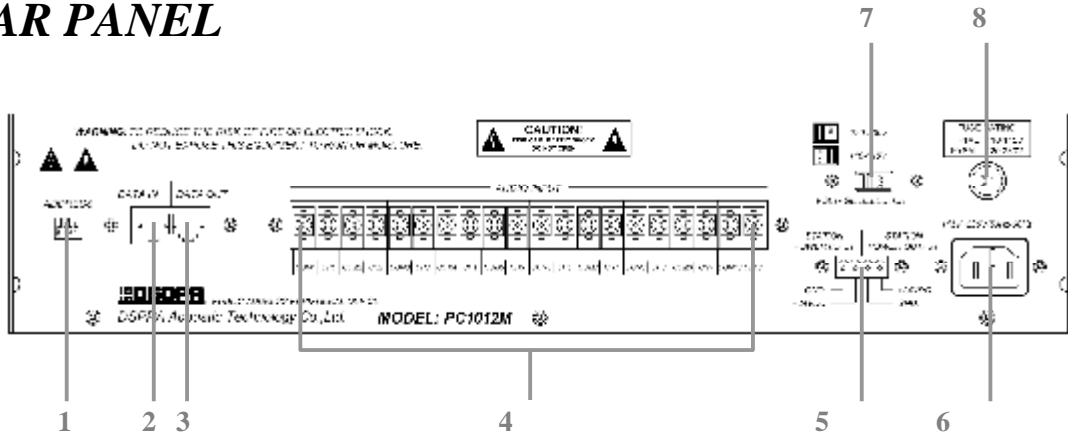

- 1 Remote input
- 2 Remote output
- 3 1-10CH input terminals
- 4 DC24V input jack
- 5 AC input jack
- 6 AC Fuse rating
- 7 AC 110V/220V switch

# CONNECTION

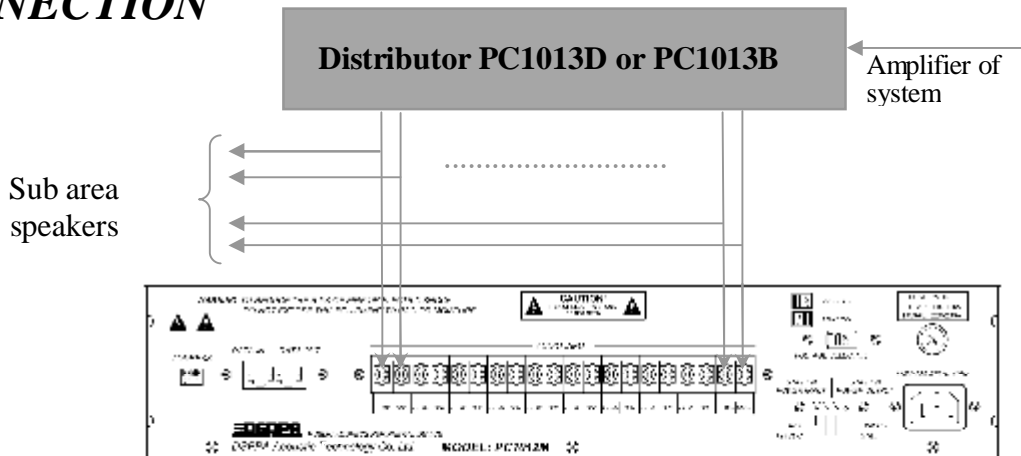

## OPERATION

- 1、 Make connections as shown above then turn on the power. It can work in AC **220V, 110V or DC24**
- 2、 Select channel which you want to monitor with **Right shift key** or **Left shift key**. Speaker on the front panel will sound with a red LED lit.
- 3、 Control the volume with **Volume controller** on front panel. The level of every channel doesn't regard the volume.
- 4、 Can connect to 8 equipments via the address setting, it can control 80 zones separately.

## SPECIFICATIONS

<b>Channels</b>	<b>10, switchable</b>
<b>Inputs</b>	<b>70-100V , 10k<math>\Omega</math></b>
<b>Output</b>	<b>65dB Variable</b>
<b>Frequency response</b>	<b>100Hz-15kHz(<math>\pm</math>3dB)</b>
<b>Signal to noise ratio</b>	<b>80dB</b>
<b>Speaker</b>	<b>Inside</b>
<b>Protection</b>	<b>AC fuse<math>\times</math>1(220V: F0.5AL, 110V: F1AL)</b>
<b>Power Requirement</b>	<b>1. AC220V/110V 50/60Hz 2. DC24V</b>
<b>Outer Packing Size (mm)</b>	<b>(L<math>\times</math>W<math>\times</math>H)555<math>\times</math>455<math>\times</math>185</b>
<b>Unit Size (mm)</b>	<b>(L<math>\times</math>W<math>\times</math>H)484<math>\times</math>349.5<math>\times</math>88</b>
<b>Gross weight</b>	<b>8.4kg</b>
<b>Net weight</b>	<b>6.6kg</b>

Specifications are subject to be changed without notice.

### CAUTION

- When the "Power switcher" is off, please pull out the power cord from the socket. Please keep the equipment out of water.
- To reduce the risk of electric shock, do not remove the cover.
- No user parts inside. Refer servicing to qualified service personnel.

DSPPA Acoustic Technology Co., Ltd.