



# HEADWORN MICROPHONES

## Product Specification



**HM-500 Frequency Response:**

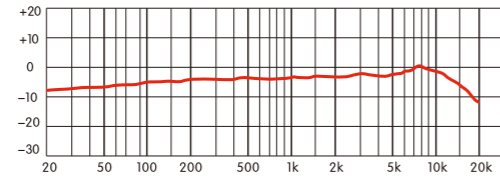



HM-500 Polar Pattern

Element: Back Electret Condenser  
 Polar Pattern : Unidirectional  
 Sensitivity : -47dB ±2dB  
 Output Impedance : ≤2.2KΩ  
 S/N Ratio : ≥58dB  
 Dimensions of capsule : Φ6.0×5.0mm  
 Frequency Response : 45Hz-18KHz  
 Power Supply : 2-10V DC  
 Cable : 1.2m  
 Connector: Mini XLR-4P

**HM-500(S/B)**  
Unidirectional



**HM-510 Frequency Response:**

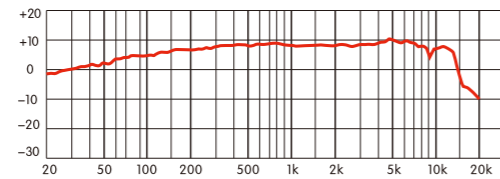



HM-510S Polar Pattern

Element: Back Electret Condenser  
 Polar Pattern : Unidirectional  
 Sensitivity : -48dB ±2dB  
 Output Impedance : ≤1.8kΩ  
 Dimensions of capsule : Φ6.0×5.0mm  
 Frequency Response : 50Hz-15KHz  
 Power Supply : 2-10V DC  
 Cable : 1.2m  
 Connector: Mini XLR-4P

**HM-510S**  
Unidirectional



**HM-600 Frequency Response:**

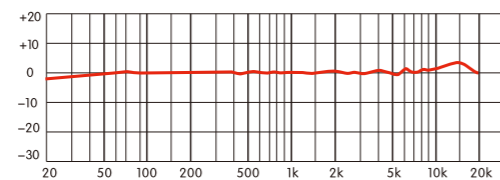

HM-600 Polar Pattern

Element: Back Electret Condenser  
 Polar Pattern : Omnidirectional  
 Sensitivity : -40.5dB ±2dB  
 Output Impedance : ≤2.2KΩ  
 S/N Ratio : ≥59dB  
 Dimensions of capsule : Φ4.0×1.5mm  
 Frequency Response : 20Hz-18KHz  
 Power Supply : 2-10V DC  
 Cable : 1.2m  
 Connector: Mini XLR-4P

**HM-600(S/B)**  
Omnidirectional





# LAVALIER MICROPHONES

## Product Specification



**LM-C460 Frequency Response:**

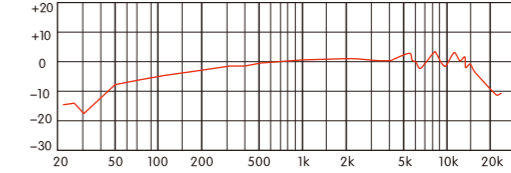



LM-C460 Polar Pattern

Element: Back Electret Condenser  
 Polar Pattern : Unidirectional  
 Sensitivity: -37dB  
 Output impedance: ≤1.8kΩ  
 S/N Ratio : ≥59dB  
 Dimensions of capsule : Φ4.0×1.5mm  
 Frequency response: 20-12000Hz  
 Power Supply: 2-10V DC  
 Cable: 1.2m  
 Connector: Mini XLR-4P

**LM-C460**  
Unidirectional



**LM-C480 Frequency Response:**

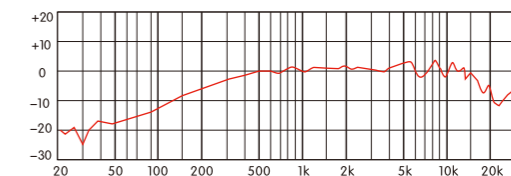



LM-C480 Polar Pattern

Element: Back Electret Condenser  
 Polar Pattern : Unidirectional  
 Sensitivity: -45dB  
 Output impedance: ≤1.8kΩ  
 S/N Ratio : ≥59dB  
 Dimensions of capsule : Φ4.0×1.5mm  
 Frequency Response: 60-12000 Hz  
 Power Supply: 2-10V DC  
 Cable: 1.2m  
 Connector: Mini XLR-4P

**LM-C480**  
Unidirectional



**LM-C550 Frequency Response:**

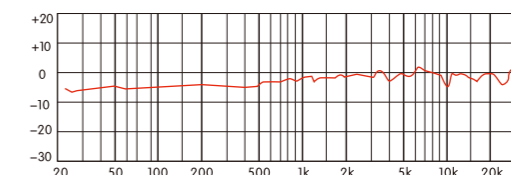



LM-C550 Polar Pattern

Element: Back Electret Condenser  
 Polar Pattern: Omnidirectional  
 Sensitivity: -41dB  
 Output impedance: ≤1.8kΩ  
 S/N Ratio : ≥59dB  
 Dimensions of capsule : Φ4.0×1.5mm  
 Frequency Response: 60-20000 Hz  
 Power Supply: 2-10V DC  
 Cable: 1.2m  
 Connector: Mini XLR-4P

**LM-C550**  
Omnidirectional



**LM-C620 Frequency Response:**

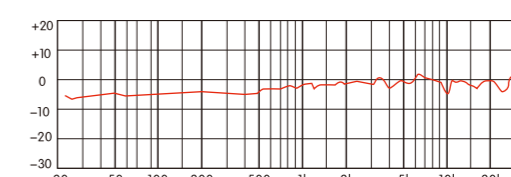

LM-C620 Polar Pattern

Element: Back electret condenser  
 Polar Pattern: Omnidirectional  
 Sensitivity : -40.5dB±2dB  
 Output Impedance : ≤2.2KΩ  
 S/N Ratio : ≥59dB  
 Dimensions of capsule : Φ4.0×1.5mm  
 Frequency Response : 20Hz-18KHz  
 Power Supply : 2-10V DC  
 Cable: 1.2m  
 Connector : Mini XLR-4P

**LM-C620**  
Omnidirectional

