


Ceiling Mounted Speaker Series

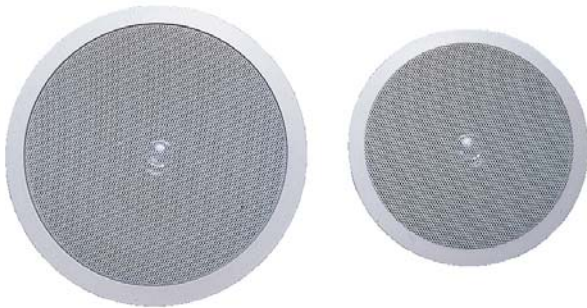

Features:

- **Appearance:**
The speaker box is ABS material feature protecting from fire damages.
Building-integrated stylish shape and silver-gray color for different decoration
- **Internal:**
Using round soft clip, very safe and will not injure hands.
- **100% MADE IN TAIWAN**

TECHNICAL SPECIFICATIONS

MODEL NO.	WS-100	WS-100T	WS-650	WS-650T	WS-801	WS-801T	WS-802	WS-802T
Rated Input	15W	15W	35W	35W	20W	20W	35W	35W
Input impedance	8Ω	100V Line 2W-5KΩ 4W-2.5KΩ 6W-1.67KΩ	8Ω	100V Line 2W-5KΩ 4W-2.5KΩ 6W-1.67KΩ	8Ω	100V Line 2W-5KΩ 4W-2.5KΩ 6W-1.67KΩ	8Ω	100V Line 2W-5KΩ 4W-2.5KΩ 6W-1.67KΩ
Sound Pressure Level	92dB	92dB	89dB	89dB	93dB	93dB	92dB	92dB
MAX Sound pressure level	105dB	2W-95dB 4W-98dB 6W-100dB	104dB	2W-92dB 4W-95dB 6W-97dB	106dB	2W-96dB 4W-99dB 6W-101dB	107dB	2W-95dB 4W-98dB 6W-100dB
Frequency Response	80-15KHz	80-15KHz	60-20KHz	60-20KHz	80-15KHz	80-15KHz	60-20KHz	60-20KHz
Speaker Unit	6.5"	6.5"	coaxial two way low 6.5" high 2"	coaxial two way low 6.5" high 2"	6.5"	6.5"	coaxial two way low 8" high 2"	coaxial two way low 8" high 2"
Mounting Type	Ceiling Mounted							
Dimension	186X75mm				234x95mm			
Weight	0.7kg	0.8kg	0.9kg	1.0kg	1.1kg	1.2kg	1.3kg	1.3kg
Box Material	ABS							
Hole Size	166mm				207mm			

*The appearance and specifications of all item are subject to change without notice